

The DSP_SUA2018 Safety Uart Analysis

- > 19inch Rack Mount
- > Easy to Use(Front panel interface/stand-alone operation)
- > Flexible(Remote operation by Ethernet)
- > Powerful(Up to 22 port : each two channel)



Features


- o Digital Switch Port 22 , Two Ethernet
- o Logic Analysis Function
- o Protocol Analysis Function
- o PC GUI easy Interface
- o Transfer Message Capture Function
- o Receive Message Capture Function
- o Virtual Message Send Function

Panel



General Information

- o 12 Color LED Button uses
- o Power On/Off Switch
- o Reset with Cover Case
- o 19 inch Rack Mount
- o Switch Control 10/100/1000BaseT Ethernet
- o Power Supply (120 ~ 240V)
- o Easy PC GUI

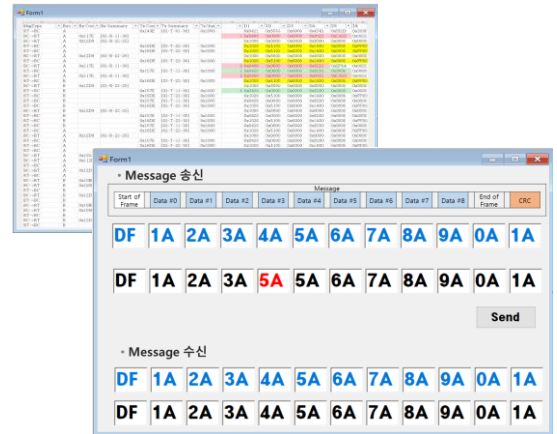

Ordering Information

- DSP_SUA2018-22 : 22 Port for 2 Channel
- DSP_SUA2018-16 : 16 Port for 2 Channel
- DSP_SUA2018-4 : 4 Port for 2 Channel

Environment Information

- Operating temperature range
Commercial : 0 °c ~ 45 °c
- Storage temperature range
-25 °c ~ 85 °c

Contact

TEL : +82-70-7150-3240, E-Mail : jpark@sungjindsp.com